

ACCESSORIES

Guns

- 243283 Silver Plus gun, 2-finger trigger, RAC X (517) + guard
- 246240 Silver Plus gun, 2-finger trigger, RAC 5 (517) + guard
- 246468 Silver Flex gun, 2-finger trigger, RAC X (517) + guard
- 241705 TexSpray™ blue gun, 4-finger trigger, GHD (531) + guard
- 224991 Mastic roofing gun without diffuser, 1/2" and 3/8" adapters, GHD535 tip - 280 bar - 1/2" fluid passages
- 224472 Mastic roofing pole gun (90 cm extension) - 280 bar - 1/2" fluid passages

BlueMax™ II Hoses

- 277251 3/8" x 15m - 280 bar
- 277253 1/2" x 15m - 280 bar

BlueMax™ II Whips

- 277249 1/4" x 0.90m - 280 bar
- 277351 3/8" x 0.90m - 280 bar

Fittings

- 156849 3/8" npt x 3/8" npt (MBE) - 500 bar
- 158491 1/2" npt x 1/2" npt (MBE) - 510 bar
- 159239 1/2" npt x 3/8" npt (MBE) - 510 bar
- 157350 1/4" npt x 3/8" npt (MBE) - 413 bar

Gun, Tip, Hose Kits

- 287043 Silver Plus, LTX517, 3/8" x 15m, hose, 90 cm whip, fittings - 280 bar
- 287850 Silver Plus, 286517, 3/8" x 15m, hose, 90 cm whip, fittings - 280 bar
- 287851 Silver Flex, 286517, 3/8" x 15m, hose, 90 cm whip, fittings - 280 bar

Pump Lower

- 287834 GH 833 QuikChange™ pump lower, complete
- 287843 GH 833 direct immersion kit
- 287832 MaxLife™ technology piston rods
- 287833 MaxLife™ technology sleeve

Siphon Kits

- 287916 1.5" x 2 m - for non-solvent materials
- 287936 2" x 2 m - for non-solvent materials
- 287915 1.5" x 2 m - for solvent borne materials



GH 833

Hydraulic "Big Rig" Airless Sprayer



NEW

www.graco.be

PROFESSIONAL ADVANTAGES

- The answer to professional, reliable & high production output
- QuikChange™ pump removal system
- MaxLife™ rod & sleeve - Endurance™ Pump

MATERIALS

The unit that can spray it all! Architectural coatings - Protective coatings
Industrial coatings - Roofing - (no aggregates)

Painter - Heavy Duty Applications
GH 833





GH 833

Hydraulic "Big Rig" Airless Sprayer

GH 833 Advanced Features



QuikChange™ Pump

No tool pump removal system



Replace the pump yourself and send it in for repair while you continue working.



MaxLife™ Technology

Exclusive coating technology used on the piston rod and sleeve. Unmatched life. Drastically reduces maintenance costs.



Flow-through Filter System

- Hand tight filter removes with the cap
- Debris stays inside the colour coded filters
- Flow-through for optimal use of the filter surface

Heavy Duty Frame

- Large pneumatic wheels roll over rough terrain
- Sturdy welded frame
- Detachable handle bar for fix-truck mounting



High efficiency Hydraulic Motor with Heavy Duty Cooling System

- Fast change-over design for uniform pressure at the gun
- 100% o-ring sealed fittings
- No hydraulic stalls through special ramp design
- Few moving parts immersed in "low" pressure oil, improving life
- Proven cooler and blower system regardless of ambient temperature



QuikAccess™ Endurance™ Pump

- Quickly clear the pump with basic tools
- Flow through design for Maximized pumping efficiency
- Adjustable packing nut that can easily be tightened on the job

Huge 1.5" suction hose

for large volumes of paint
* Stinger tube added standard for direct immersion



GH 833

SPECIFICATIONS

GH 833 Big Rig*

GH 833 OEM Kit

Part Numbers:

GH833 - Euro Version BARE	253471	253473
Max. Tip Size (1 gun)	0.065"	
Max. Tip Size (2 guns)	0.045"	
Fluid Outlet Size	3/8"(m) npt**	3/8"(m) npt**
Flow	15.0 l/min. (4.0 gpm)	15.0 l/min. (4.0 gpm)
Max. Working Pressure	280 bar (4000 PSI)	280 bar (4000 PSI)
Weight	163 kg (360 lbs)	28.6 kg (63 lbs)
Dimensions - cm (inch) - H x W x D	102 (40) x 68.5 (27) x 119.3 (47)	100 (39.5) x 19 (7.5) x 15 (5.5)
Max. Hose Length	90 m	
Honda® GX Engine Output	9.7 kW (13.0 HP)	
Honda® Engine Displacement	389 cm ³	
Fuel Tank Capacity	6.5 l	
Fuel Consumption	313 g/kW.hr	
Motor/Pump Ratio		1.45:1
Max. Hydraulic Pressure		190 bar (2750 PSI)
Hydraulic Flow Required		23.6l/min. (6.25 gpm)
Max. Cycle Rate		64 cc/min.

* Stinger tube and strainer included with GH 833

** Remove nipple for 1/2" connection

GRACO N.V. • Fluid Handling Solutions
Industrieterrein Oude Bunders • Slakweidestraat 31 • B-3630 Maasmechelen
Tel. (32) 89 770 700 • Fax (32) 89 770 777
www.graco.be (Europe)

© 2007 Graco N.V. - Form No. 320593 E (rev.B) - 10/07 - Printed in Europe.
Graco is certified ISO 9001.

All information, illustrations, and specifications in this document are based on the latest product information available at the time of publication. The right is reserved to make changes at any time without notice.



GH 833

Direct Immersion Kit (optional, 287843)



Optional System

- Easy to install



View movie clip at:
www.GH833.eu




Simple Tool Installation

- Crescent wrench
- Pipe wrench



Aggressive Materials

- The solution for hard to pump coatings
- Put it straight into a 208 l drum

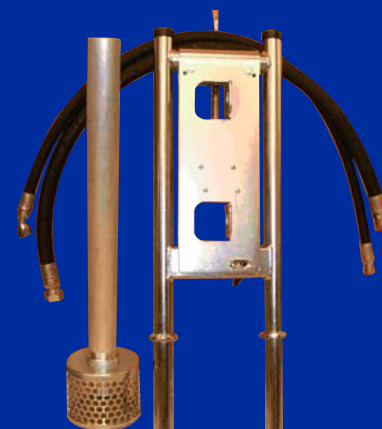

GH 833 Advanced Features